



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems



ADJUSTABLE DOOR SEALS

Surface Mounted Automatic Doors Seals

- **Reduces Sound Through Door Units**
- **Economical**
- **Easy to Install**
- **Durable**


Kit 1- Standard

Automatic Door Bottom 320C

320C



- Adjusting screw
- File Seal
- Full case reversible without changing mechanism
- Radiation shielding lead bars available on special order
- Minimum size 24"
- Maximum size 48"
- Maximum drop 3/4"
- Sponge Neoprene

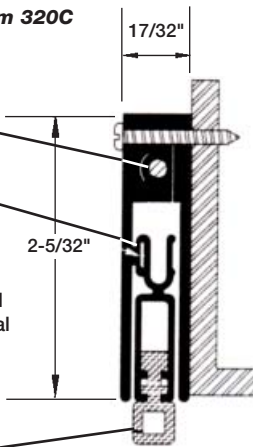


Adjustable Jamb Seal 33C

(3 piece set 2 - 7' long & 1 - 3' long)

33C



- 1/2"
- 1-5/16"
- 1/4" Max. Adjustment
- Sponge Neoprene
- For Lighter Duty use 33 Series




Kit 2- Heavy Duty

Automatic Door Bottom 330C

330C



- 7/8"
- 2-5/16"
- Sponge Neoprene

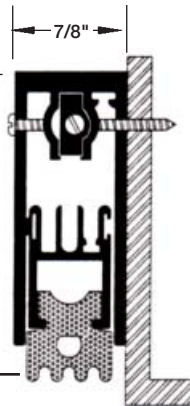


Adjustable Jamb Seal 599C

(3 piece set 2 - 7' long & 1 - 3' long)

599C




- 7/8"
- 1-1/2"
- Door

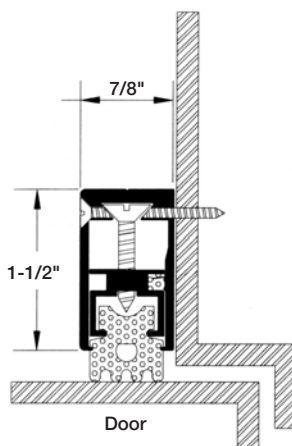


Door Frame Sound Gaskets

631 — 1/8" x 3/8" x 50 ft.



629 — 3/16" x 3/8" x 100 ft. or 300 ft.



Please Note: Door bottoms are not designed to seal directly on carpet. For best results door bottoms should seal on a solid surface. The solid surface should be positioned above the level of the floor covering on either side of the door.

Continued on next page...



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318


(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com


Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems


Automatic Door Bottom – Anodized Aluminum Color Choices



Clear



Dark Bronze



Gold

Automatic Door Bottom – Acoustical Performance STC in Accordance with ASTM E90-75



Model	Door Caulked Shut STC	With Door Bottom STC
320C – No Threshold	32	28
330C – No Threshold	44	37
330C – With Threshold	51	43

NOTE: Standard 1-3/4" Solid Core Door
 5 lbs/sf STC – 22 (No Seals), 33 (With Door Seals)
 7 lbs/sf STC – 46



Self Adjusting Magnetic Astragal

(Used for Double / French Doors)

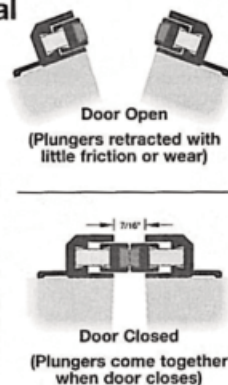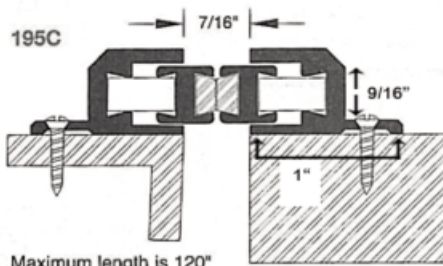

Mortised Door Seal

(Adjustable Hidden Door Seal)

370A

 With sponge neoprene in bar

