



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)

Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problems**

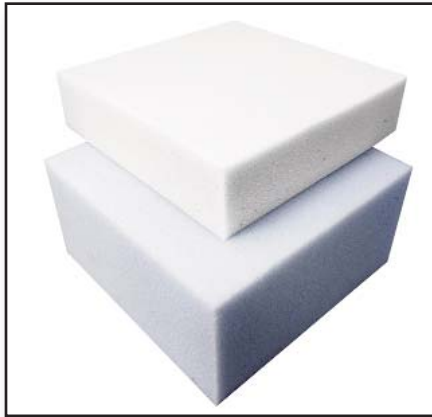

## Flat Faced Melamine Foam

### Acoustical Melamine Foam

- **Class A Fire Retardant**
- **High Performance Sound Absorber**
- **Fiber Free**

**MATERIAL:** Open Cell Melamine Acoustical Foam

**PATTERN:** Flat

**FEATURES:** Designed For sound absorption in a wide range of frequencies. Increased surface absorption area

**APPLICATIONS:** Industrial, Commercial, Audio, OEM Residential Markets, Ceilings, Walls, Partitions, Sound/Recording Studios, Radio Stations, Board Rooms, Swimming Pools, Churches, Schools, Gun Ranges, Enclosures

**THICKNESS:** 1", 2"

**SIZES:** 2' x 2' & 2' x 4'

**EDGE DETAIL:** Square (also available with half-beveled edges by request)

**DENSITY:** 0.7lbs/cub. ft.

**COLOR:** *Standard:* Natural White or Light Grey

*Latex or HPC Paint:* Black, Light Grey, Almond

*Painted:* Black, Brown, Beige, Light Gray (Custom colors also available)

**FLAMMABILITY:** ASTM E84, Class A. Flame Spread: 6; Smoke Developed: 15

**INSTALLATION:** Acoustical Adhesive

### Available as Hanging Acoustical Baffles

ASI Flat Faced Melamine Foam Sound Absorption/Noise Reduction							
	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	0.10	0.10	0.30	0.70	0.80	0.90	0.60
2"	0.10	0.35	0.90	1.25	1.15	1.10	1.00

