



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems

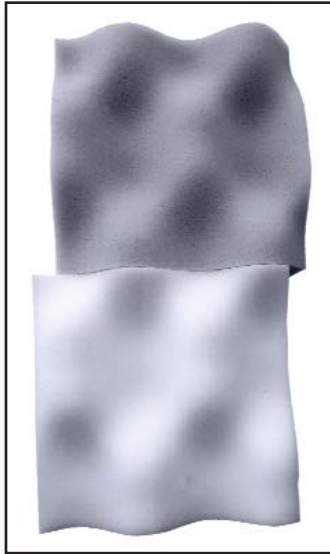

FOAM S.T.O.P. SOUNDWAVE™

Melamine Foam Sound Absorber

- **Class A Fire Retardant**
- **High Performance Sound Absorber**
- **Sound Wave Pattern**
- **Fiber Free**

MATERIAL: Open Cell Melamine Acoustical Foam.

PATTERN: Convoluted Double Hump Anechoic Wedges. Sonex™ Pattern Also Available.

FEATURES: Designed For Sound Absorption in a Wide Range of Frequencies. Increased Surface Absorption Area.

APPLICATIONS: Industrial, Commercial, Audio, OEM Residential Markets, Ceilings, Walls, Partitions, Sound/Recording Studios, Radio Stations, Board Rooms, Swimming Pools, Churches, Schools, Gun Ranges, Enclosures.

THICKNESS: 1", 2", 3", 4". **SIZES:** 2' x 2', 2' x 4' **DENSITY:** 0.7 lbs./cub. ft.


COLORS: *Standard:* Natural White or Light Grey.

Latex or HPC Paint: Black, Light Grey, Almond.

Painted: Black, Brown, Beige, Light Gray (Custom colors also available).

FLAMMABILITY: ASTM E84, Class A. Flame Spread: 6; Smoke Developed: 15.

INSTALLATION: ASI S.T.O.P Noise Acoustical Adhesive.

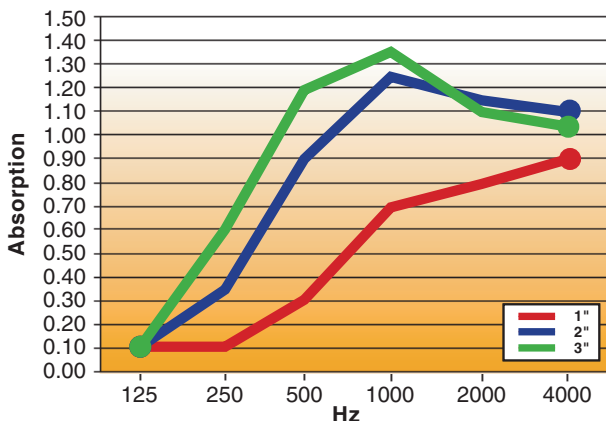

FOAM S.T.O.P. Dualwave: Sound Absorption / Noise Reduction

| | 125Hz | 250Hz | 500Hz | 1KHz | 2KHz | 4KHz | NRC |
|----|-------|-------|-------|------|------|------|------|
| 1" | 0.10 | 0.10 | 0.30 | 0.70 | 0.80 | 0.90 | 0.60 |
| 2" | 0.10 | 0.35 | 0.90 | 1.25 | 1.15 | 1.10 | 1.00 |
| 3" | 0.10 | 0.60 | 1.20 | 1.35 | 1.10 | 1.05 | 1.15 |
| 4" | N/A | N/A | N/A | N/A | N/A | N/A | N/A |

Available with Hypalon Washable Finish

Available as Hanging Acoustical Baffles