



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)


Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problems**

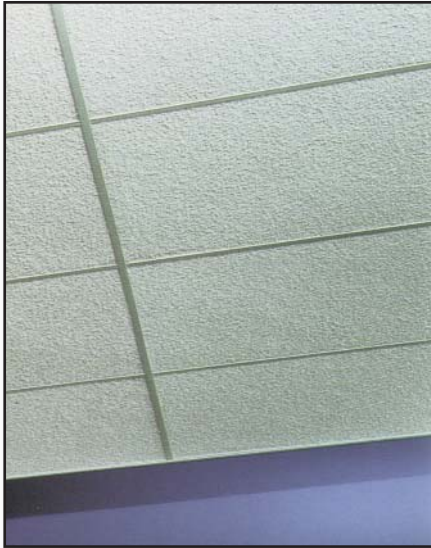

## PAINTED NUBBY FIBERGLASS Acoustical Ceiling Tile

- **High Performance Acoustics**
- **Lightweight**
- **Durable Woven Facing**
- **Sag-Free**



Panel Texture

**MATERIAL:** Semirigid fiberglass with a painted woven textured fiberglass facing.

**SIZE:** 2' x 2', 2' x 4', 4' x 8'.

**THICKNESS:** 1" or 2".

**APPLICATIONS:** Ceiling tile applications where high acoustical performance is required.

**WEIGHT:** 0.5 lb./sq./ft. for 1", 1 lb./sq. ft. for 2".

**FLAMESPREAD:** Per E-84, 25 f/s, Smoked developed 50.

**LIGHT REFLECTANCE:** LR-1 (actual .87).

**THERMAL RESISTANCE:** 1" = R-4.

**MAINTENANCE:** Can be easily cleaned with soft brush or vacuum.

	Mount	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	E	.69	.95	.85	1.06	1.11	1.08	.95