



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)

Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problems**

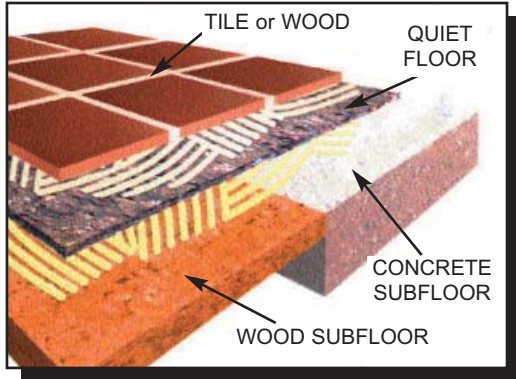

## QUIET FLOOR™ ACOUSTIC UNDERLAY

**Impact Reduction Pad for Floors**

- *Economical*
- *Recycle "Green" Product*
- *Easy to Install*

**MATERIAL:** 100% Pre-consumer recycled synthetic fiber.

**FEATURES:** Lightweight - smooths minor floor imperfections.


**APPLICATIONS:** Flooring underlay to reduce impact floor noise in commercial and residential construction.

**THICKNESS:** .1/8" **SIZES:** 3' x 33-1/3' & 61" x 60' rolls **WEIGHT:** 2.22 oz/sq. ft. **DENSITY:** 13.3#/cub. ft.

**COLOR:** NA.

**FLAMMABILITY:** Meets Federal Flammability Standard CPSC-FFI-70 (Pill Test).


**INSTALLATION:** ASI Noise S.T.O.P. Acoustical Adhesive.



**FIIC 60**

**FFIC 39** 20" Porcelain Tile

STC per ASTM E-90-97 (Airborne)						
125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	STC
35	40	54	63	70	71	52

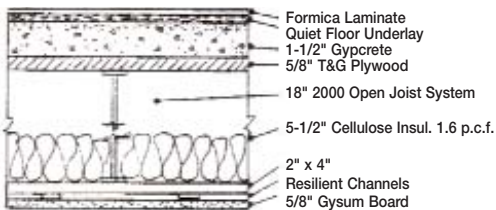


**STC 52**

**STC 53**  
**IIC 52**

2" x 12" Ceramic Glazed Tile

IIC per ASTM E-492-92 (Impact)						
125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	IIC
58	56	44	30	20	18	58

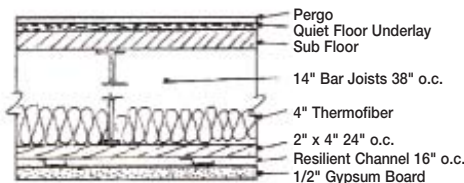

**IIC 58**